



OGRADE / MOBILNE OGRADE

INSYTEMP O

TEHNIČKE SPECIFIKACIJE

Dužina panela	3430mm
Visina panela	2000mm
Horizontalna cev	Ø 30mm
Vertikalna cev	Ø 40mm
Prečnik žice	3,0 mm
Otvor oka	250x120mm




→ PREDNOSTI:


- ✓ **VIŠESTRUKA NAMENA** - INSYTEMP otvorene mobilne ograde predstavljaju najbolju opciju za zaštitu gradilišta, u svakom okruženju i na različitim tipovima podloge kao i događaja na otvorenom prostoru.
- ✓ **KVALITET** - Sve naše mobilne ograde su napravljene korišćenjem Euro Smartweld 100 tehnologije.
- ✓ **BRZA I JEDNOSTAVNA INSTALACIJA** - Brza i jednostavna instalacija glavna su osobina mobilnih ograda.
- ✓ **KOMPAKTNA I STABILNA CELINA** - Betonski blokovi predstavljaju stabilnu osnovu, dok metalni konektori omogućavaju da sistem mobilnih panela predstavlja kompaktnu i stabilnu celinu. Dodatna stabilnost i sigurnost može se postići upotrebom stabilizatora sa pločom i ostalih dodataka. Mobilne ograde mogu biti kompletirane pešačkom kapijom ili kapijom za vozila.




INSYTEMP O

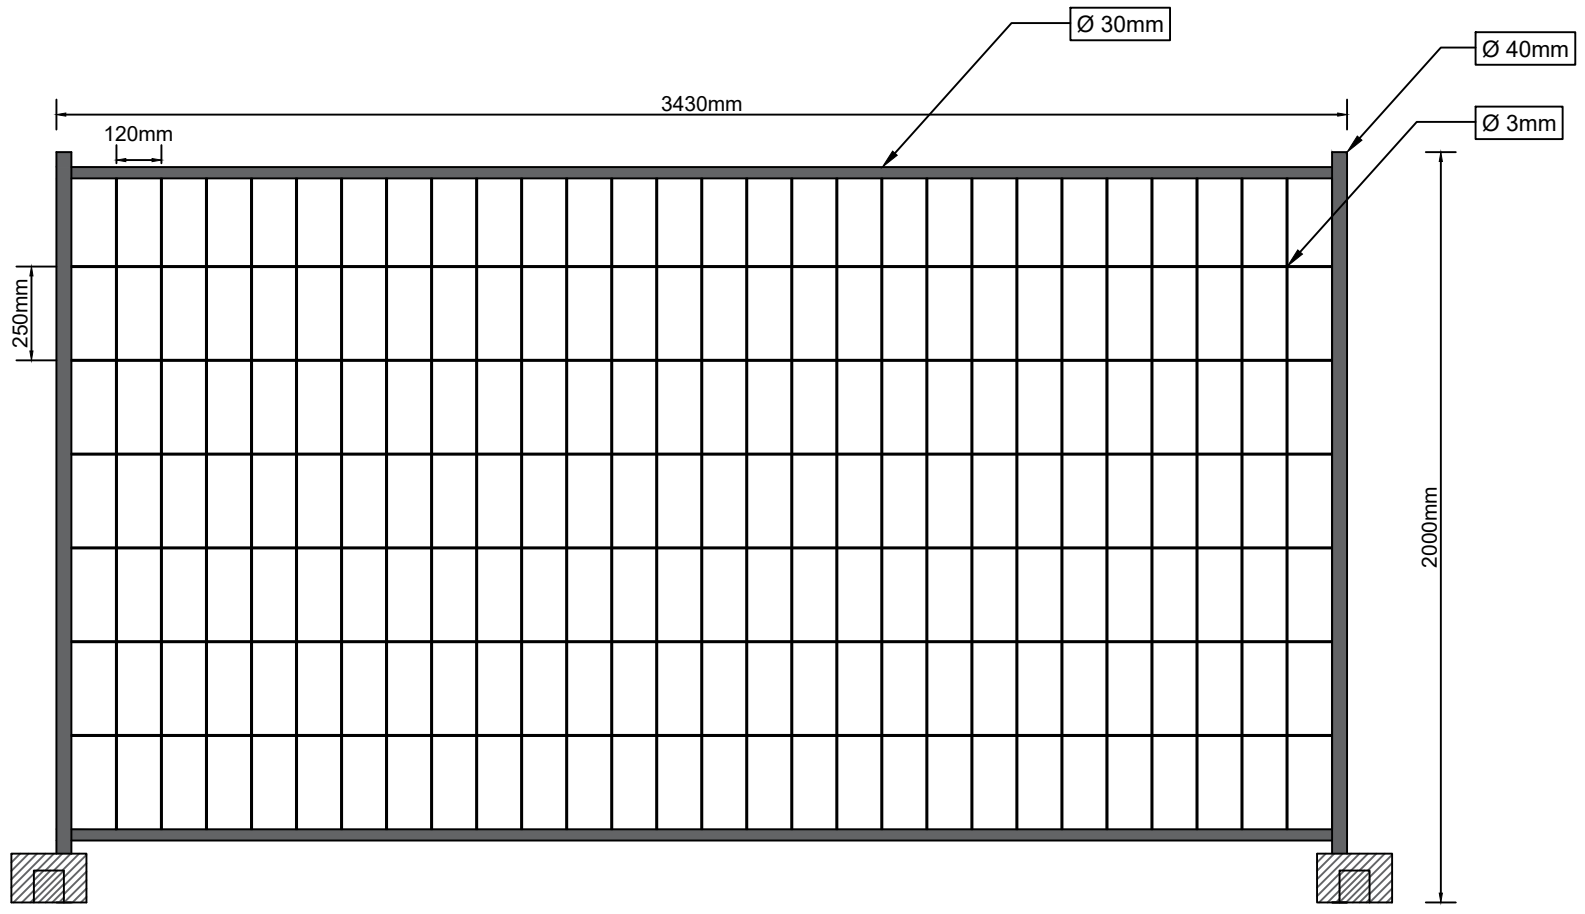


JEDNOKRILNA KAPIJA INSYTEMP O

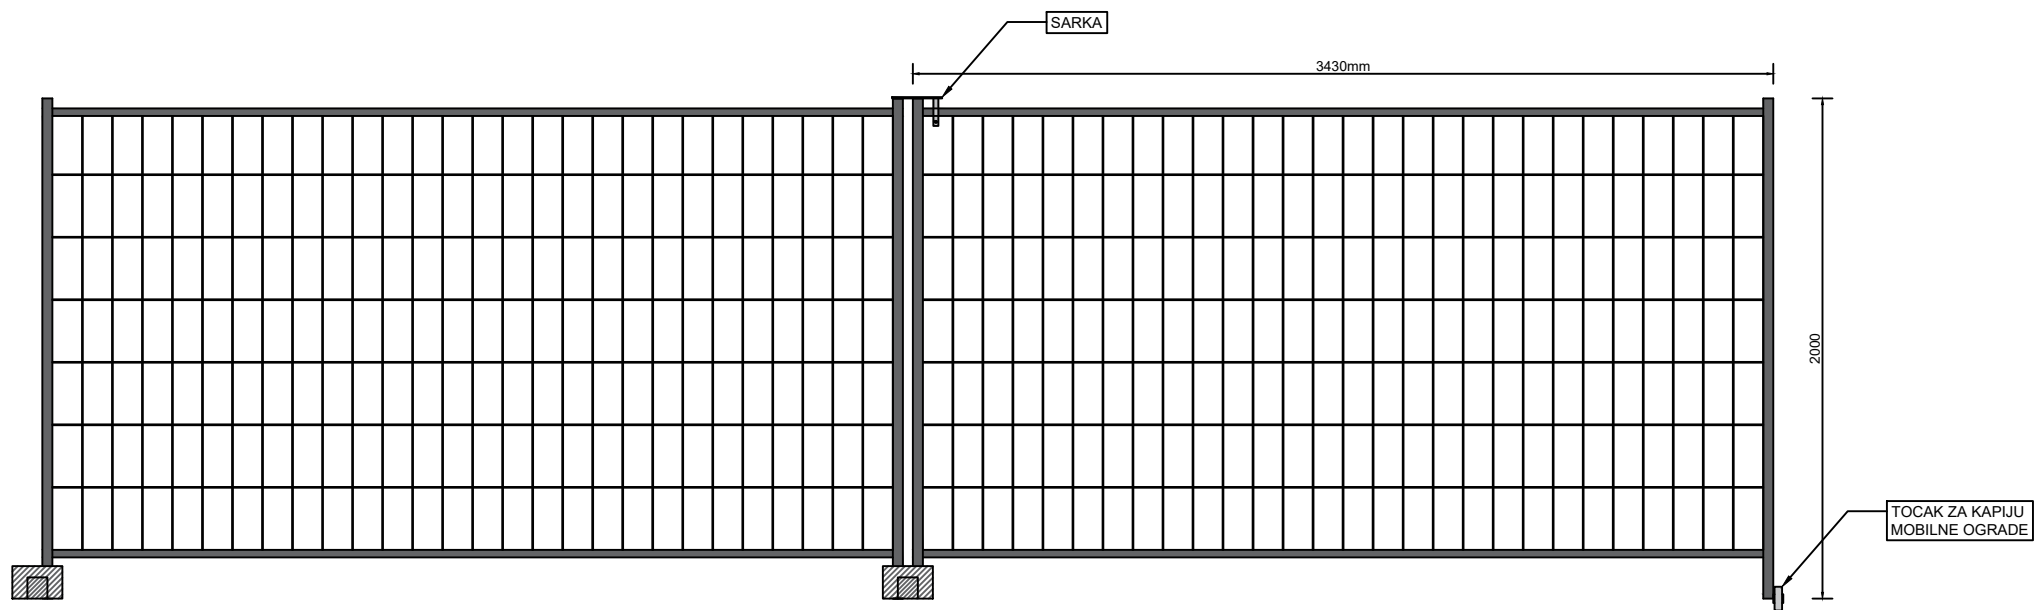


DETALJ SARKA



DETALJ TOCAK



DVOKRILNA KAPIJA INSYTEMP O

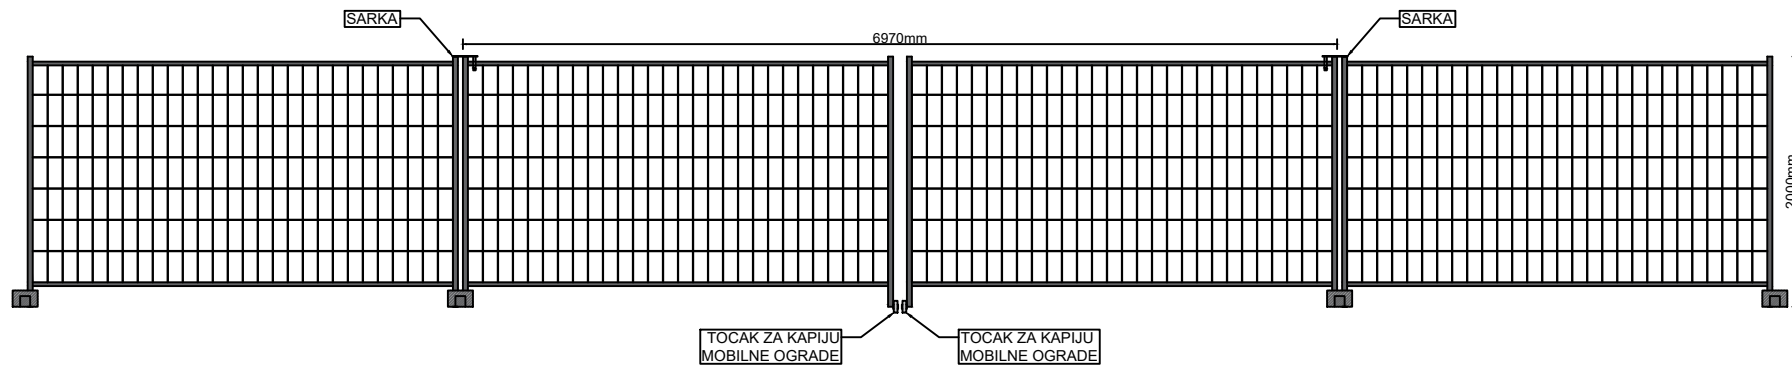

DETALJ SARKA



DETALJ TOCAK

